

All dimensions shown are in millimetres

All steel construction: dia 22mm x 2mm tube

Connections: 1.2m long flying lead (3 core)

Immersion heater rating: IPX4 or better

This radiator may only be installed vertically as shown

Reg. Number 2056314

Designed by Paul Priestman & Manufactured for Bisque in Italy

DISCONTINUED STOCK
information for reference only


Model	Output		Weight kg	Height ± 2mm	Length ± 2mm	Fixing Centres ± 2mm
	Watts	BTU				
MHOT 60/E	150	512	15	650	150	450
MHOT 120/E	300	1023	20	1250	150	1050
MHOT 150/E	400	1364	26	1610	150	1410
MHOT 180/E	500	1705	30	1850	150	825

Tools & Material Required

- Tape measure
- Screwdriver - large flathead
- Electric drill
- Masonry drill bit - 10mm diameter
- Spirit level
- Step ladder (for taller radiators)

Key	Component	Qty
A	Wall Plug	* 2
B	Bracket	* 2
C	Screw - Rnd Head, 7mm dia x 70mm	* 2
D	Grub Screw	** 4
E	Allen Key - 3mm	1

* 3 supplied for MHOT 180/E
 ** 6 supplied for MHOT 180/E

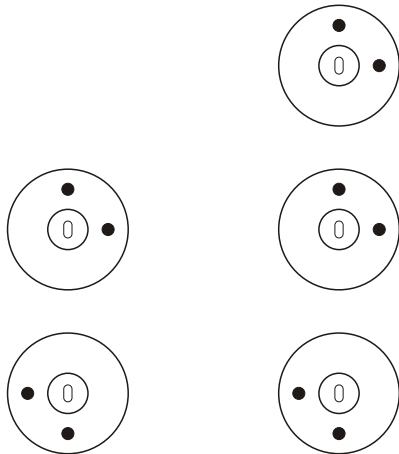

MHOT 60/E, 150E & 120/E MHOT 180/E

fig 1. Bracket Positions

DISCONTINUED STOCK
 information for reference only

Assembly Instructions

Accurately mark out bracket holes on wall using spirit level, to dimensions as shown on Technical Data Sheet.

Depending on radiator height, drill two or three 12mm diameter holes to a minimum depth of 65mm & insert wall plugs (A).

Attach brackets (B) to wall with screws (C).

Position brackets (B) on wall with grub screw holes as shown in figure 1 for maximum rigidity before tightening screws (C).

Hang radiator onto brackets (B) by inserting lugs into brackets (B).

Tighten grub screws (D) with allen key (E).

Electric radiators should be fitted only by a qualified electrician and must be earthed and connected to a cable outlet in the bathroom in accordance with I.E.E. wiring regulations. The electrical connection should be made to a '5 amp fused fixed spur' located outside the bathroom.

Note: for maintenance purposes, cable outlets must remain accessible and cables must not be buried directly into walls.

