

All dimensions shown are in millimetres

All steel construction: **dia 25mm x 1.25mm tubes**
dia 26mm x 1.55mm headers

Connections: **1.2m long flying lead (3 core)**

Immersion heater rating: **IPX4 or better**

Reg. Number 2603E-2505E

Manufactured for Bisque by Arbonia AG of Switzerland


DISCONTINUED STOCK
 information for reference only

Model	Output		Chrome Finish Output		Weight kg	Height ± 2mm	Length ± 2mm	Fixing Centres ± 2mm
	Watts	BTU	Watts	BTU				
BW 79-45	300	1023	300	1023	14	775	450	417
BW 120-45	500	1705	400	1364	20	1194	450	417
BW 155-45	700	2387	500	1705	24	1532	450	417
BW 185-45	700	2387	500	1705	29	1840	450	417
BW 79-50	400	1364	300	1023	15	775	500	467
BW 120-50	500	1705	400	1364	21	1194	500	467
BW 155-50	700	2387	500	1705	27	1532	500	467
BW 185-50	900	3069	700	2387	32	1840	500	467
BW 79-55	400	1364	300	1023	16	775	550	517
BW 120-55	500	1705	500	1705	23	1194	550	517
BW 155-55	700	2387	700	2387	28	1532	550	517
BW 185-55	900	3069	700	2387	34	1840	550	517
BW 79-60	400	1364	300	1023	18	775	600	567
BW 120-60	700	2387	500	1705	25	1194	600	567
BW 155-60	900	3069	700	2387	30	1532	600	567
BW 185-60	900	3069	700	2387	37	1840	600	567

Tools & Material Required

- Tape measure
- Screwdriver - crosshead & medium flathead
- Electric drill
- Masonry drill bit - 10mm diameter
- Spirit level
- Stepladder (for taller radiators)

Key	Component	Qty
A	Bracket - Box Section	2
B	Screw - Round Head, M6 x 10mm	2
C	Screw - Pan Head, M6 x 20mm	2
D	Bracket - Alloy	2
E	Wall Plug	3
F	Wall Stay	1
G	Screw - Hex Head, 7mm dia x 100mm	2
H	Cap	2
I	Screw - Hex Head, 7mm dia x 60mm	1

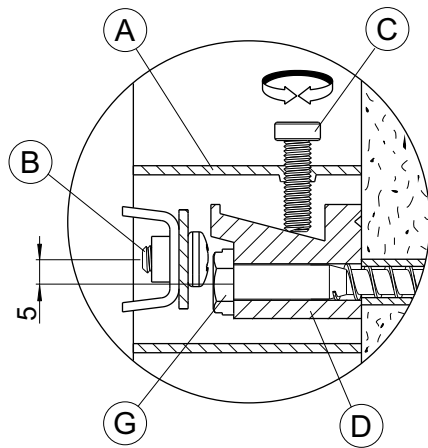

DISCONTINUED STOCK
information for reference only

Assembly Instructions

Attach brackets (A) to lugs with screws (B) as shown, ensuring adjustment screw hole is uppermost, and insert adjustment screws (C) a few turns.

Attach wall stay (F) to lower lug.

Accurately mark out upper bracket holes on wall using spirit level, to dimensions as shown on Technical Data Sheet.

Drill two 10mm diameter holes to a minimum depth of 80mm & insert wall plugs (E). Screw alloy brackets (D) into wall plugs (E) with 7mm diameter x 100mm screws (G).

Hang radiator onto alloy brackets (D).

Tighten adjustment screws (C) down fully and then release as necessary to level radiator.

Cover adjustment screws (C) with caps (H).

Adjust wall stay (F) to position radiator parallel to wall.

Mark wall through slot in wall stay (F), move stay aside and drill 10mm diameter hole to a minimum depth of 65mm. Insert wall plug (E), reposition wall stay (F) with slot over hole & insert 7mm diameter x 60mm screw (I). Fasten to wall.

Electric radiators should be fitted only by a qualified electrician and must be earthed and connected to a cable outlet in the bathroom in accordance with I.E.E. wiring regulations. The electrical connection should be made to a '5 amp fused fixed spur' located outside the bathroom.

Note: for maintenance purposes, cable outlets must remain accessible and cables must not be buried directly into walls.

